

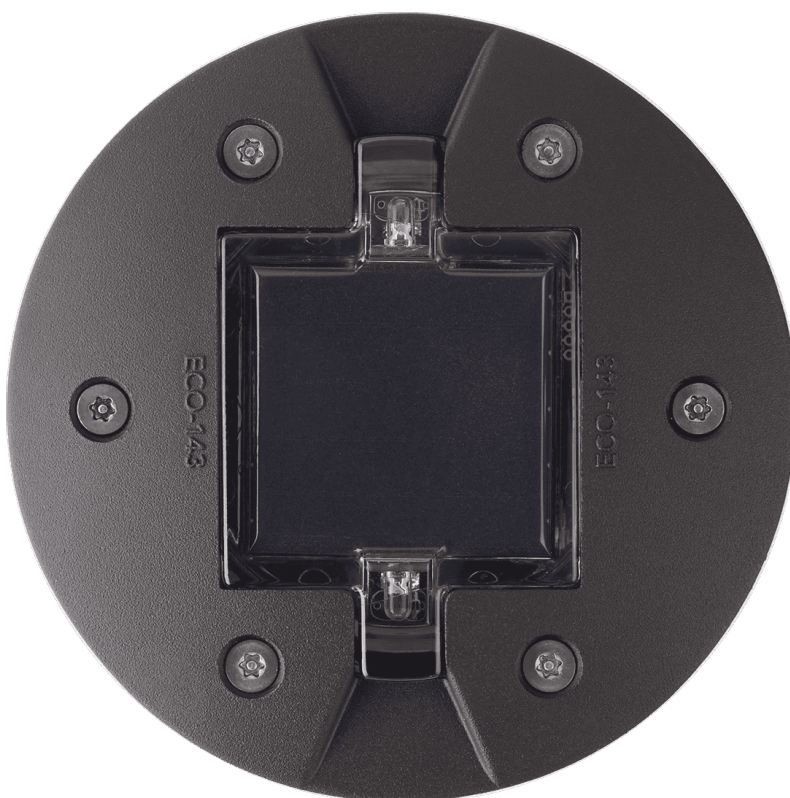


ECO-143

SOLAR - Embedded solar studs

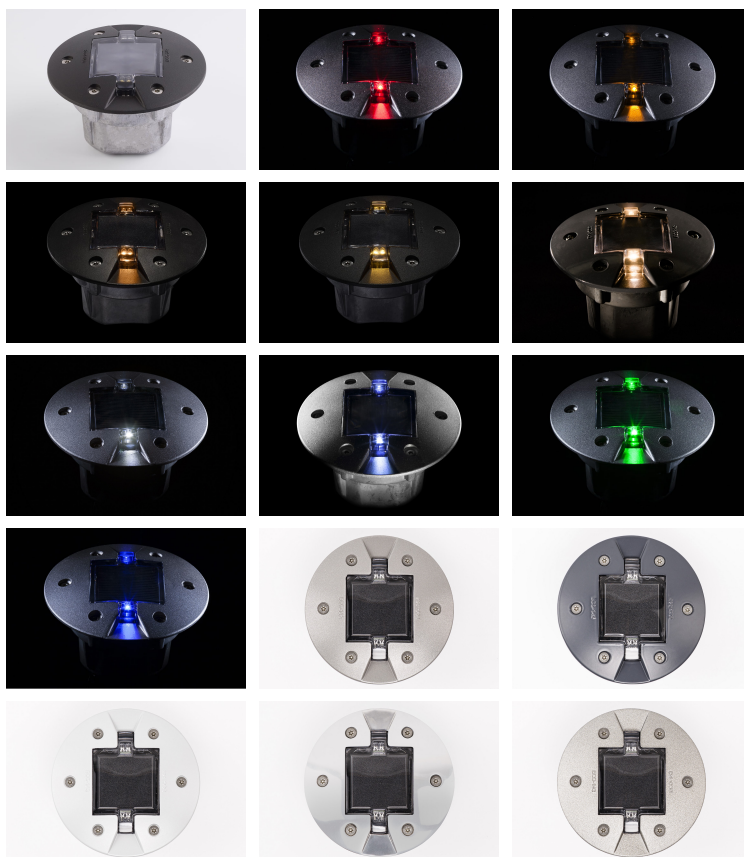

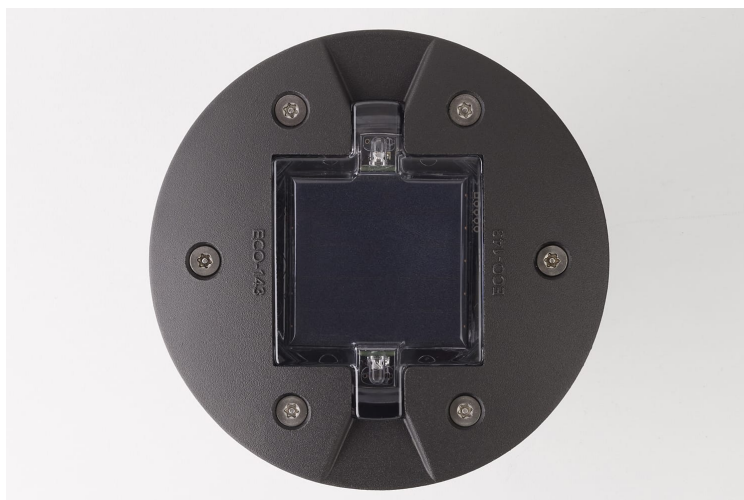

Embedded solar stud

Fully self-contained luminous beaconing solution. Resembles a roadway nail for complete integration into urban and architectural contexts. Easy maintenance via the product cover.

Applications

Pontoons / Footbridges, Eco-districts, Footpaths, Cycle paths, Parks / Public squares

Resistance



Standards



LED Colors



Beaconing

1 LED, 2 LED, 4 LED, Constant, Blinking, Grazing

Customization


Aluminium cap, Anodised cap, Powder coated cap (RAL available), Polished cap, Unpolished cap

Recycling



Certifications



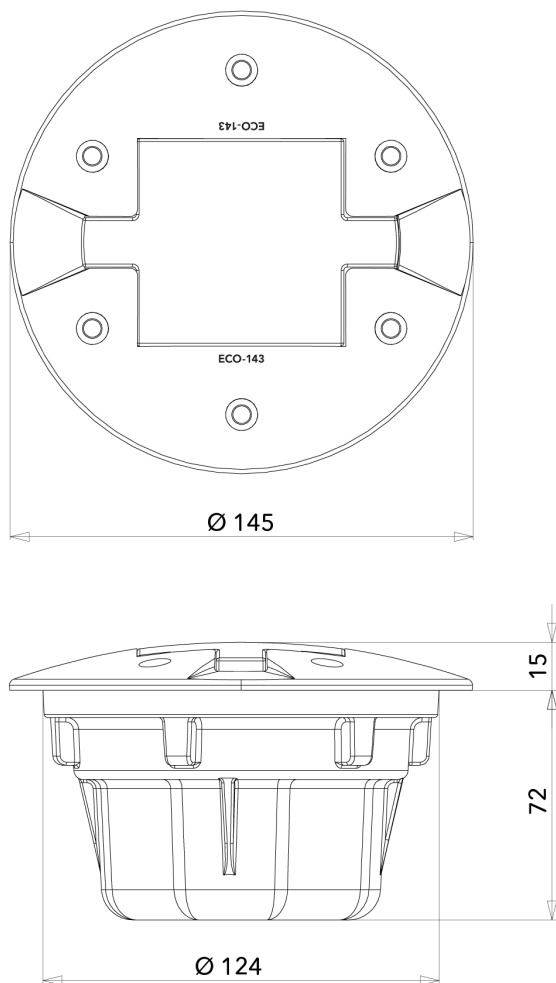

Unité : mm - Tolérance +/- 0.5mm. © Eco-Innov - Tous droits réservés.

TECHNICAL CHARACTERISTICS

Dimensions and weight

Upper diameter: 145 mm.

Total height: 87 mm.

Height above roadway: 3 mm at each end / 15 mm in the centre.

Weight: approximately 1 Kg.

Materials

Aluminium, Polycarbonate, Silicon (photovoltaic panel).

Recycling managed by ECOSYSTEM.

Energy storage

1. Condenser.

2. Ni-Mh accumulator.

Maintenance

Solar electronic module replaced via the product cover.

Working temperature range

-30°C to +85°C.

Protection indices

IP 68 - 5 meters (watertightness).

IK 10+ 100 Joules (impact resistance).

Pressure resistance





Withstands the pressure of pedestrians, cycles and light vehicles.

LIGHTING CHARACTERISTICS

Unidirectional or bidirectional beaconing, 1 or 2 LEDs per side.

Constant or blinking 2.5Hz (2.5 flashes per second) $\pm 10\%$.

LEDs colours: cool white, warm white, amber, red, green, blue.

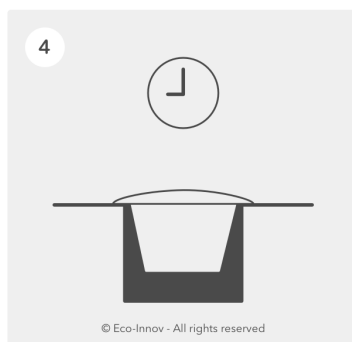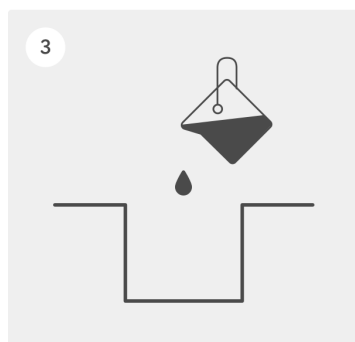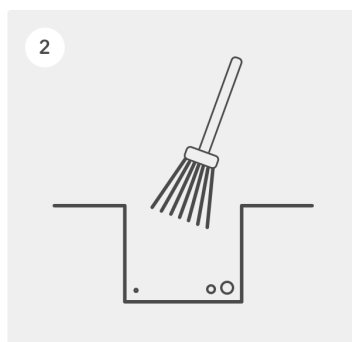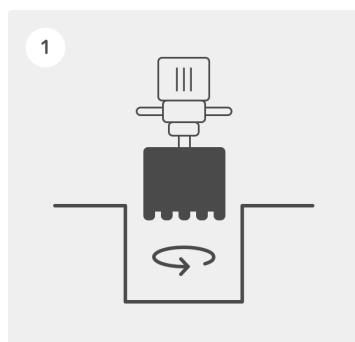

1 - After deciding where the studs are to be installed, drill a hole with a minimum diameter of 126 mm and 100 mm deep.

2 - Carefully brush and clean the hole to remove any dust and traces of damp that would affect the efficiency of the adhesive.

3 - Pour the appropriate bonding adhesive into the hole, then insert the stud into the adhesive. It is essential to use a sufficient quantity of SIKADUR 30 epoxy adhesive: there must be adhesive under the entire lower part of the aluminium cover. Use a mallet to position the stud flush with the ground surface. Make sure the LEDs are facing the right way and are parallel to the ground. Immediately remove any residual adhesive from around the stud. If the stud is installed on a tarred concrete support, we recommend using SIKADUR 30 two part epoxy adhesive. On a wooden support, we recommend using less rigid adhesives (Please contact us for further information).

4 - Place a weight on the stud until the adhesive has set (refer to the instructions).

Remark: make sure to keep the module and LEDs clean and protect them throughout these operations.

Failure to comply with these instructions may lead to the guarantee being suspended.

Lifespan and warranty

BATTERY

- a. Condenser: Average lifespan more than 10 years. 2-year warranty*
- b. Ni-Mh accumulator: Average lifespan more than 5 years. 2-year warranty*

Easy maintenance via the product cover.

* The warranty applies in the event of complete failure of the self-contained lighting system during normal usage. It covers replacement of the faulty article with an identical model delivered free of charge to destinations in France, after the faulty article has been returned and analysed. On-site intervention fees are not included. Mechanical damage are not covered by the warranty.

For optimal operation, we recommended to install our solar equipment on sites with good light exposure.

Recycling

ECO-INNOV is a founder member of a network that recycles professional WEEE, managed by the eco-organisation ECOSYSTEM. We pay for our customers' electronic safety, lighting and regulation equipment to be collected at the end of its working life in order to meet our legal obligations and help them to meet theirs.

The unique identifier FR006801_05MBCK attesting to registration in the register of producers in the EEE sector, pursuant to article L.541-10-13 of the Environmental Code, has been assigned by ADEME to the company ECO-INNOV (SIRET 451 859 409 00026). This identifier certifies its conformity with regard to its obligation to registration in the register of producers of Electrical and Electronic Equipment and the realisation of its declarations of placing on the market with Ecosystem.

ECO-INNOV is thus one of the first producers to offer its customers a simple and free solution for collecting their professional WEEE, regardless of when it was marketed. The equipment is collected via a network of professional waste collection centres and certain wholesalers.



www.ecosystem.eco



LED beaconing for a cycle path: La Vélodyssée. LED beaconing for a cycle path: La Vélodyssée. PM: Nantes Métropole, Photography: Camille Saada.



Riverside promenade. Visual delineation of the centre of the cycle path and pedestrian promenade in the City of Raon L'Etape. ECO-143 embedded solar stud (bidirectional beaconing, 1 constant white LED per side). Lighting design: Scène Publique, Agathe Argod assisted by Flore Siesling Photography: Michel Denancé.